浩成科技 HOCHEN TECH

标签印刷装备

LABEL PRINTING EQUIPMENT

# HCF350-1C+4

## 间歇冷烫+平模切


INTERMITTENT COLD FOIL + FLATBED DIE CUTTING

**单色柔印单元**

1-color flexo unit

**联线加工**

Inline finishing

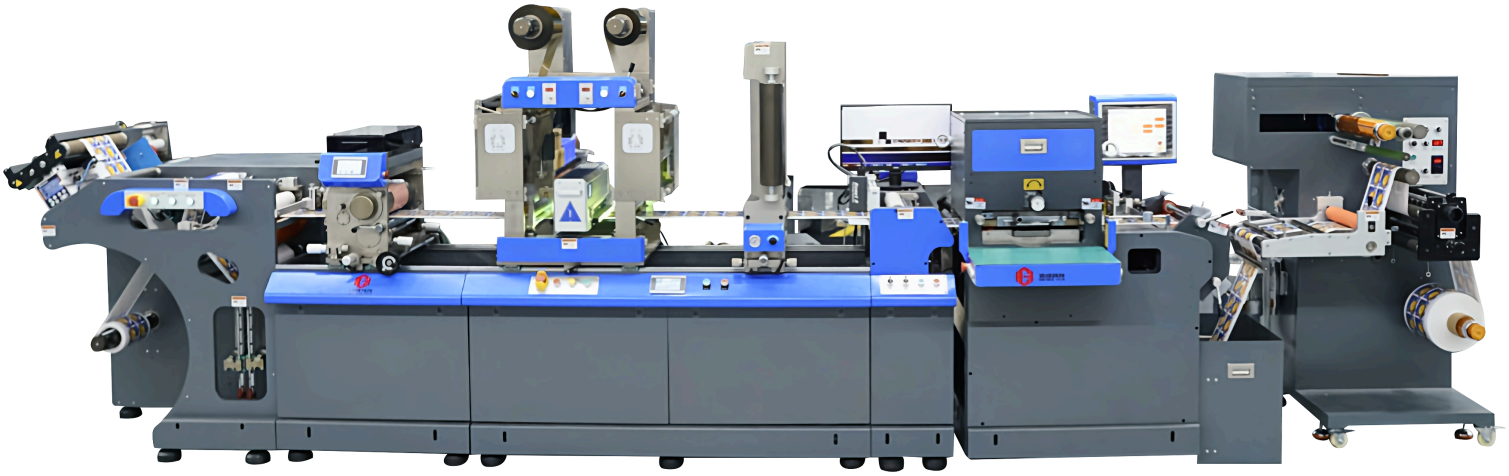

印刷、冷烫与模切联线组合

| 350 mm | 350 × 350 mm | 800 mm |
|---|---|---|
| 进纸宽度 | 最大模切尺寸 | 最大收放卷直径 |
| Web width | Max. die-cutting size | Max. unwind / rewind diameter |

## 冷烫与模切，一线组合

COLD FOIL AND DIE CUTTING IN ONE LINE

**01 多工艺组合**

集成印刷、冷烫、平模切等工艺。

Printing, cold foil and flatbed die cutting in one line.

**02 灵活换单**

适应小批量、个性化订单。

Quick job changes for short-run and personalized work.

**03 套印准确**

兼顾套印精度与产品一致性。

Accurate registration for consistent output.

**04 紧凑走纸**

纸路紧凑，减少调机材料消耗。

A compact web path helps reduce setup waste.

# 关键工位与工艺组合

KEY STATIONS & PROCESS INTEGRATION




**柔印工位**

Flexo printing station



**冷烫工位**

Cold foil station



**平模切工位**

Flatbed die-cutting station

## 核心工艺

CORE PROCESS

| 送纸 | 印刷 | 冷烫 | 平模切 | 排废分条 | 收卷 |
|---|---|---|---|---|---|
| Feeding | Printing | Cold foil | Flatbed die cutting | Waste removal & slitting | Rewinding |

选配功能：定位烫金、高速切片等。
Options include registered hot stamping and high-speed sheeting.

# 主要技术参数

TECHNICAL SPECIFICATIONS

| 参数 | Specification | HCF350-1C+4 |
|---|---|---|
| 进纸宽度 | Web width | **350 mm** |
| 最大模切尺寸 | Max. die-cutting size | **350 × 350 mm** |
| 最大收放卷直径 | Max. unwind / rewind diameter | **800 mm** |
| 印刷色数 | Printing colors | **1C** |
| 间歇式最大印刷尺寸 | Max. intermittent print size | **340 × 370 mm** |
| 全轮转最大印刷尺寸 | Max. full rotary print size | **340 × 419 mm** |
| 印版厚度 | Plate thickness | **1.14 / 1.7 mm** |
| 双面胶厚度 | Mounting tape thickness | **0.38 mm** |
| 机器速度 | Operating speed | **250 cycles/min or 40 m/min** |
| 全轮转速度（版筒齿数） | Full rotary speed (cylinder teeth) | **80 m/min (132T)** |
| 主机功率 | Main drive power | **18 kW** |
| 机器尺寸（约） | Approx. dimensions | **6,500 × 2,000 × 2,000 mm** |
| 机器重量（约） | Approx. machine weight | **3,500 kg** |

注：速度随加工长度变化；配置及规格以实际机型为准。
Speed varies with repeat length. Specifications depend on machine configuration.